

Defensive Barriers

Technical Specification

PROM2 UNIT




Unit	Height	Width	Length	NSN
MIL2 2424 (Beige)	2' 0.61m	2' 0.61m	4' 1.22m	5680-99-968-1764
MIL2 2424 (Green)	2' 0.61m	2' 0.61m	4' 1.22m	5680-99-001-9397

A geotextile-lined unit for general use as an earth-filled barrier. The units are suitable for filling with earth, sand, gravel, crushed rock and other granular materials. The unit fulfills a wide range of uses, including the construction of protective walls and barriers.

General specifications

Geotextile-lined welded mesh barrier coated to ASTM A 856. All wires conform to BS EN 10218-2:2012. Zinc-Aluminum coatings are to BS EN 10244-2:2009, where appropriate. The geotextile is a heavy-duty, non-woven, permeable, polypropylene fabric, available in either beige or green color.

All dimensions and weights are nominal. Diagrams and product images are for illustrative purposes only.

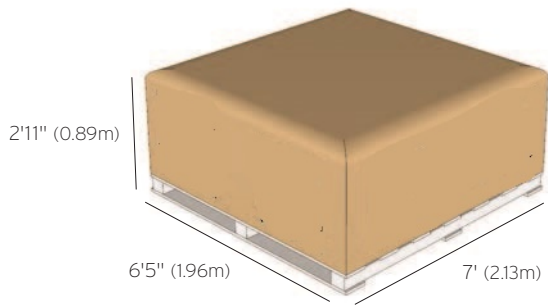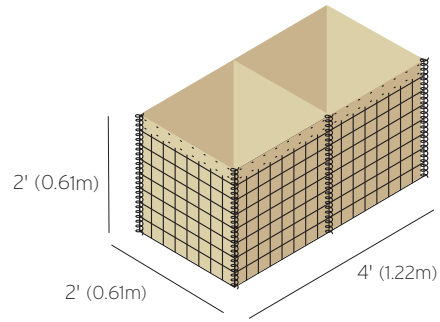

Flat-packed individual unit dimensions & weights

Height	Width	Length	Weight
2" 0.05m	2'3" 0.68m	2' 0.61m	22lb 10kg

Pallet information

Units per pallet	Height	Width	Length	Weight
120	2'11" 0.89m	6'5" 1.96m	7' 2.13m	2888lb 1310kg

Transport information

Transport Type	Pallets	Units	Deployed Length
13.5m Trailer	18	2160	8645' 2635m
20' Container	6	720	2881' 878m
40' Container	12	1440	5763' 1756m